


Key Features

- ✓ Forged body for durability and high pressure applications
- ✓ Valve body Material: SS304
- ✓ Two ways piston steam solenoid valve, normally closed
- ✓ Working Pressure 0.1/0.4 ~ 16 Bar
- ✓ Rated protection: IP65, watertight electrical enclosure
- ✓ Closing feature minimizes water-hammer on shut-off
- ✓ Working Voltage: AC230V, AC240V (50Hz/60Hz), DC24V, AC24V



Model	Size	(mm)	Pressure AC / DC	Length (L) mm	Width (W) mm	Height (H) mm	Max Temp
HWST-8	1/4"	8	0.1 ~ 16 Bar	50	30	98	180° C
HWST-10	3/8"	10	0.1 ~ 16 Bar	50	30	98	180° C
HWST-15	1/2"	15	0.4 ~ 16 Bar	70	53	135	180° C
HWST-20	3/4"	20	0.4 ~ 16 Bar	74	57	142	180° C
HWST-25	1"	25	0.4 ~ 16 Bar	92	69	150	180° C
HWST-32	1 1/4"	32	0.4 ~ 12 Bar	110	85	164	180° C
HWST-40	1 1/2"	40	0.4 ~ 12 Bar	122	90	168	180° C
HWST-50	2"	50	0.4 ~ 12 Bar	160	117	190	180° C

Dimensions

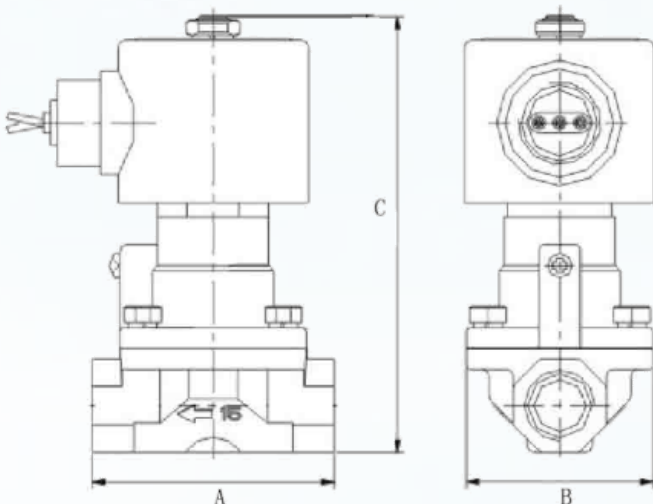

Specifications

- High Temperature Steam and liquid valve
- Rated protection: IP65
- Sealing Material: PTFE
- Temperature: From 0 ~ 180° C
- Durability: Steam, High temperature liquid
- Working Pressure: 0.1/0.4 ~ 16 Bar