


Injection Quills Assembly Datasheet

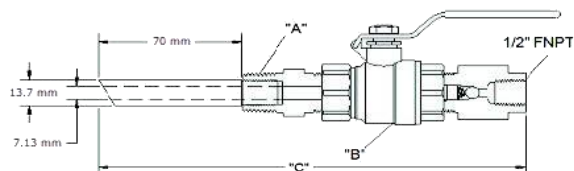

Part number /Material	Process Connection 'A'	Pump Connection	Ball Valve 'B'	Overall Length 'C'	Check Valve Material /Ball	Check Valve Material /Spring	Max. Pressure @ Temperature
QCC-050-316	1/2"	1/2"	1/2"	22.8 cm	316 SS	316 SS	246°C @ 2000psi
QCC-075-316	3/4"	1/2"	3/4"	24.1 cm	316 SS	316 SS	246°C @ 2000psi
QCC-100-316	1"	1/2"	1"	26.0 cm	316 SS	316 SS	246°C @ 2000psi
QCC-050-PVC	1/2"	1/2"	1/2"	24.1 cm	Ceramic	Hastelloy C	49°C @ 150psi
QCC-075-PVC	3/4"	1/2"	3/4"	25.4 cm	Ceramic	Hastelloy C	49°C @ 150psi
QCC-100-PVC	1"	1/2"	1"	26.7 cm	Ceramic	Hastelloy C	49°C @ 150psi
QCC-050-CPVC	1/2"	1/2"	1/2"	24.1 cm	Ceramic	Hastelloy C	88°C @ 150psi
QCC-075-CPVC	3/4"	1/2"	3/4"	25.4 cm	Ceramic	Hastelloy C	88°C @ 150psi
QCC-100-CPVC	1"	1/2"	1"	26.7 cm	Ceramic	Hastelloy C	88°C @ 150psi
QCC-050-KY	1/2"	1/2"	1/2"	26.7 cm	Ceramic	Hastelloy C	93.3°C @ 150psi
QCC-075-KY	3/4"	1/2"	3/4"	27.9 cm	Ceramic	Hastelloy C	93.3°C @ 150psi
QCC-100-KY	1"	1/2"	1"	29.2 cm	Ceramic	Hastelloy C	93.3°C @ 150psi