


Injection Quills Male-Female Datasheet

1300 585 820

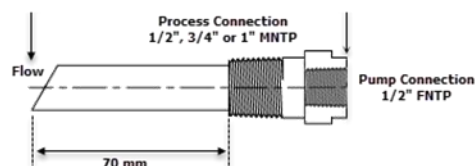

Wetted Material	Process 1/2" MNTP	Process 3/4" MNTP	Process 1" MNTP	Check Valve /Ball	Check Valve /Spring	Max. Pressure @ Temperature
316 SS	QCFM-316-050	QCFM-316-075	QCFM-316-100	316 SS	316 SS	400°C @3000psi
PVC	QCFM-PVC-050	QCFM-PVC-075	QCFM-PVC-100	Ceramic	Hastelloy C	37°C @ 150psi
CPVC	QCFM-CPVC-050	QCFM-CPVC-075	QCFM-CPVC-100	Ceramic	Hastelloy C	65°C @ 150psi
Kynar (PVDF)	QCFM-KY-050	QCFM-KY-075	QCFM-KY-100	Ceramic	Hastelloy C	93.3°C @ 150psi
Kynar (PVDF)	QCFM-KY-050-T	QCFM-KY-075-T	QCFM-KY-100-T	Teflon	Hastelloy C	93.3°C @ 150psi
Alloy 20	QCFM-C20-050	QCFM-C20-075	QCFM-C20-100	Hastelloy C	Hastelloy C	400°C @3000psi
Hastelloy C 276	QCFM-Hastelloy-050	QCFM-Hastelloy-075	QCFM-Hastelloy-100	Hastelloy C	Hastelloy C	400°C @3000psi
316 SS	QBFM-316-050	QBFM-316-075	QBFM-316-100	No check valve	No check valve	400°C @3000psi
PVC	QBFM-PVC-050	QBFM-PVC-075	QBFM-PVC-100	No check valve	No check valve	37°C @ 150psi
CPVC	QBFM-CPVC-050	QBFM-CPVC-075	QBFM-CPVC-100	No check valve	No check valve	65°C @ 150psi
Kynar (PVDF)	QBFM-KY-050	QBFM-KY-075	QBFM-KY-100	No check valve	No check valve	93.3°C @ 150psi
Alloy 20	QBFM-C20-050	QBFM-C20-075	QBFM-C20-100	No check valve	No check valve	400°C @3000psi
Hastelloy C 276	QBFM-Hastelloy-050	QBFM-Hastelloy-075	QBFM-Hastalloy-100	No check valve	No check valve	400°C @3000psi